

Series 6, gas hob, 75 cm, Tempered glass, Black PPQ7A6B90





The tempered-glass gas hob with FlameSelect: achieve perfect cooking results thanks to nine precisely defined power levels.

- **FlameSelect:** adjust the gas flame precisely using nine defined levels.
- Wok burner: powerful cooking at up to 4 kW.
- **Standard and semi-flush built-in option:** choose between flush or surface mounted installation.
- Semi-continuous cast-iron pan support: for high stability and easy cleaning.
- **Biomethane-ready:** your gas hob can also be powered with renewable biomethane gas.

Technical Data

Product name/family : gas hob w integrated controls Construction type : Built-in Energy input : Gas Total number of positions that can be used at the same time : 5 Type of control setting devices : sword knobs Min. required niche size for installation (HxWxD) : $45 \times 560-562$ x 480-492 mm Width of the appliance : 752 mm Dimensions of the packed product (HxWxD) : 145 x 793 x 597 mm Net weight : 19.0 kg Gross weight : 20.5 kg Residual heat indicator : without Location of control panel : Hob front Basic surface material : Tempered glass Color of surface : Black Color of frame : Black Length electrical supply cord : 100.0 cm EAN code : 4242002914985 Gas connection rating : 11500 W Fuse protection : 3 A Voltage : 220-240 V Frequency : 60; 50 Hz





Series 6, gas hob, 75 cm, Tempered glass, Black PPQ7A6B90

The tempered-glass gas hob with FlameSelect: achieve perfect cooking results thanks to nine precisely defined power levels. ordered via the customer service. For nozzle change, please contact the customer service.

- Dimensions of the product (HxWxD mm): 58 x 752 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 492)
- Min. worktop thickness: 30 mm
- Power cord: 1 m
- Connected load: 11.5 KW

- frameless: install the hob either flush or slightly raised on the

Design

- worktop
- Cast iron pan supports with rubber feet

- Tempered glass surface, Black

Usage convenience

- FlameSelect: precisely control and adjust the flame in nine defined levels.
- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

Burners and power

- 5 gas burners
- Left front: economy burner up to 1 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Center front: wok burner up to 4 KW (depending on gas type)
- Right rear: High-speed burner up to 3 KW (depending on gas type)
- Right front: Standard burner up to 1.75 KW (depending on gas type)

Safety


- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE) NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Pre-set for natural gas
- Nozzle set for LPG jets included. Connection to 28-30/37 mbar bottled gas. Nozzles for all other gas types can be



Series 6, gas hob, 75 cm, Tempered glass, Black **PPQ7A6B90**

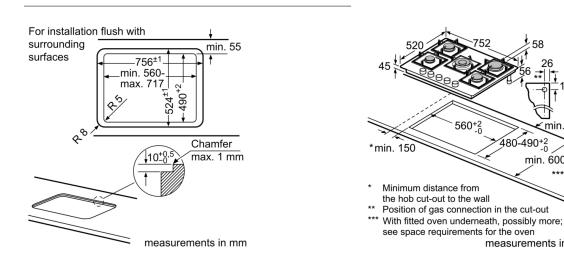



58

480-490⁺²-0

560⁺²

19-29

30

(min. 55

min. 600 ***min.

measurements in mm