


**Series 8, Domino gas hob, 30 cm,
Ceramic glass, Black
PRA3A6B70**

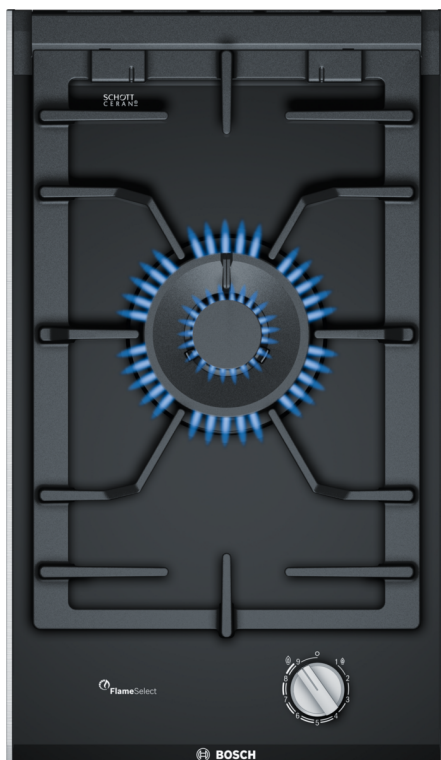

Included accessories

1 x WOK attachment ring

Optional accessories

HEZ298105 Simmer plate
HEZ298113 Small pot support
HEZ394301 Connecting strip

**The domino gas hob with FlameSelect:
achieve perfect cooking results thanks to
nine precisely defined power levels.**

- **FlameSelect:** adjust the gas flame precisely using nine defined levels.
- **Dual flame power burner with two heat options,** quickly boil water or maintain a precise simmer.
- **Dishwasher-proof pan supports:** make cleaning your hob even easier.
- **Continuous cast-iron pan support:** for high firmness and stability of cookware.
- **Biomethane-ready:** your gas hob can also be powered with renewable biomethane gas.

Technical Data

Appliance type: Vario/Domino gas hob w control
Appliance type: Vario/Domino gas hob w control
Built-in / Free-standing: Built-in
Built-in / Free-standing: Built-in
Heating type: Gas
Heating type: Gas
Number of cooking zones: 1
Number of cooking zones: 1
Min. required niche size for installation (HxWxD): 45 x 270 x 490-500 mm
Min. required niche size for installation (HxWxD): 45 x 270 x 490-500 mm
Width of the appliance: 306 mm
Width of the appliance: 306 mm
Dimensions: 59 x 306 x 527 mm
Dimensions: 59 x 306 x 527 mm
Dimensions of the packed product (HxWxD): 190 x 380 x 580 mm
Dimensions of the packed product (HxWxD): 190 x 380 x 580 mm
Net weight: 8.7 kg
Net weight: 8.7 kg
Gross weight: 9.6 kg
Gross weight: 9.6 kg
Residual heat indicator: without
Residual heat indicator: without
Location of control panel: Front
Location of control panel: Front
Basic surface material: Ceramic glass
Basic surface material: Ceramic glass
Color of surface: Black, Alu, brushed
Color of surface: Black, Alu, brushed
Color of frame: Black
Color of frame: Black
Length electrical supply cord: 100.0 cm
Length electrical supply cord: 100.0 cm
EAN code: 4242005357284
EAN code: 4242005357284
Gas connection rating: 6100 W
Gas connection rating: 6100 W
Fuse protection: 3 A
Fuse protection: 3 A
Voltage: 220-240 V
Voltage: 220-240 V
Frequency: 50; 60 Hz
Frequency: 50; 60 Hz
Included accessories: 1 x WOK attachment ring



**Series 8, Domino gas hob, 30 cm,
Ceramic glass, Black
PRA3A6B70**

**The domino gas hob with FlameSelect:
achieve perfect cooking results thanks to
nine precisely defined power levels.**

Design

- ceramic glass surface, Black
- Facette front, rear and side profiles, aluminium, brushed
- Cast iron pan supports
- Low profile burner: elegant burner design

Usage convenience

- FlameSelect: precisely control and adjust the flame in nine defined levels.
- Pan supports dishwasher safe: clean without effort in the dishwasher.
- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

Burners and power

- 1 gas burner
- Including 1 dual control wok burner: use an extra wide power range, separately controlling two flame rings.
- Center front: wok burner up to 6.1 KW (depending on gas type)

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)


- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Pre-set for natural gas
- Nozzle set for LPG jets included. Connection to 28-30/37 mbar bottled gas. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 59 x 306 x 527
- Required niche size for installation (HxWxD mm) : 45 x 270 x (490 - 502)
- Min. worktop thickness: 30 mm
- Power cord: 1 m
- Connected load: 6.1 KW

Accessories

- Wok ring included

**Series 8, Domino gas hob, 30 cm,
Ceramic glass, Black
PRA3A6B70**


Measurer



L	X
306	57
396	66

If two or more
to one are required
elements


Measurer



L	X
606	118
816	139
916	149

When installed in
a hob, two
required


Measurer



L	X
606	87
816	108
916	118

When installed in
a hob, two
required


Measurer



L	X
306	88
396	97

If two or more
to one are required
elements

Measurements in mm
Picture for the tab
cutout dimension:




IT
D
Cl

V
A


2
1
1
1
1
2
1
1
1
1
3
2
2
2
2
2
1
1
1
1
1
2
4
3
1
2
1

Measurer
Assembl



L	X
306	57
396	66


If two or more
to one are required
elements



45

* min.
100

A



B: Depen

* Minimum
the hot
** Positio
*** With fit
see sp

3 /