DG 7140
Built-in steam oven
for healthy cooking with automatic programmes and networking.



- Clear-text display with sensor controls – DirectSensor S
- Perfect results – DualSteam technology
- Perfect results guaranteed every time – Automatic programmes
- Easy preparation of a complete meal – menu cooking
- Network-enabled WiFi appliance – Miele@home

EAN: 4002516156642 / Material number: 11094410 / Old Material Number: 23714040GB

| | |
|---|---|
| **Construction type and design** | |
| Built-in steam oven | • |
| ContourLine | • |
| Appliance Colour | Stainless steel/Clean Steel |
| **Convenience features** | |
| External steam generation | • |
| Menu cooking without transfer of taste | • |
| Automatic programmes with ability to make individual adjustments | • |
| Keeping warm | • |
| **Operating modes** | |
| Defrosting | • |
| Automatic programmes | • |
| Steam cooking | • |
| Reheat | • |
| Eco steam cooking | • |
| Special applications | • |
| **User convenience** | |
| Networking with Miele@home | • |
| Display | DirectSensor S |
| SoftOpen | • |
| SoftClose | • |
| MultiLingua | • |
| Quantity-independent cooking | • |
| Steam cooking on up to 3 levels at the same time | • |
| Menu cooking with steam | • |
| Steam reduction before end of programme | • |
| Time of day display | • |
| Minute minder | • |
| Programmable start of cooking duration | • |
| Programmable end of cooking duration | • |
| Programmable cooking duration | • |
| Actual temperature display | • |
| Recommended temperature | • |
| Individual settings | • |
| **Efficiency and sustainability** | |
| Power rating in off mode in W | 0.5 |
| Power rating in standby mode in W | 1.0 |
| Power rating in networked standby in W | 2.0 |
| Time until automatic switch to standby in min | 20 |
| Time until automatic switch to networked standby in min | 20 |
| Time until automatic switch to off mode in min | 20 |
| **Cleaning convenience** | |
| Stainless steel/CleanSteel finish | • |
| Stainless-steel oven compartment with linen structure | • |
| External steam generator | • |
| Floor heater for condensate reduction | • |
| Quick-release side racks | • |
| Removable stainless-steel side racks | • |
| Descaling | • |

DG 7140
Built-in steam oven
for healthy cooking with automatic programmes and networking.



EAN: 4002516156642 / Material number: 11094410 / Old Material Number: 23714040GB

| | |
|---|---|
| CleanGlass door | • |
| **Steam technology and Water supply** | |
| DualSteam | • |
| Removal of fresh water container with Push2release | • |
| Fresh water container volume in l | 1.5 |
| **Safety** | |
| Appliance cooling system and touch-cool front | • |
| Safety switch-off | • |
| System lock | • |
| Vapour cooling system | • |
| Sensor lock | • |
| **Technical data** | |
| L oven compartment | • |
| Oven compartment volume in l | 40 |
| No. of shelf levels | 4 |
| Appliance dimensions (W x H x D) in mm | 595 x 455 x 569 |
| Door hinge | Bottom |
| Electronic steam oven temperature regulation min. in °C | 40 |
| Electronic steam oven temperature regulation max. in °C | 100 |
| Niche width min. in mm | 560 |
| Niche width max. in mm | 568 |
| Niche height min. in mm | 450 |
| Niche height max. in mm | 452 |
| Niche depth in mm | 550 |
| Appliance width in mm | 595 |
| Appliance height in mm | 455 |
| Appliance depth in mm | 569 |
| Appliance dimensions (W x H x D) in mm | 595 x 455 x 569 |
| Weight in kg | 26.4 |
| Total rated load in kW | 3.60 |
| Voltage in V | 230 |
| Frequency in Hz | 50-60 |
| Number of phases | 1 |
| Fuse rating in A | 16 |
| Mains cable with plug | • |
| Length of supply lead in m | 2 |
| **Accessories supplied** | |
| Removable side runners (pair) | 1 |
| No. of perforated stainless-steel cooking container | 2 |
| No. of solid stainless-steel cooking containers | 1 |
| Wire rack | 1 |
| Condensate tray | 1 |
| Descaling tablets | 2 |


DG 7140
Built-in steam oven
for healthy cooking with automatic programmes and networking.



EAN: 4002516156642 / Material number: 11094410 / Old Material Number: 23714040GB


| Available display languages | |
|---|---|
| Available display languages via MultiLingua | bahasa malaysia, dansk, deutsch, english, español, français, hrvatski, italiano, magyar, nederlands, norsk, polski, português, русский, română, slovenčina, slovenščina, srpski, suomi, svenska, türkçe, українська, čeština, ελληνικά, ǀ ǀ ǀ ǀ ǀ ǀ ǀ , ǀ ǀ , ǀ ǀ ǀ , ǀ ǀ ǀ ǀ , ǀ ǀ ǀ |

DG 7140
Built-in steam oven
for healthy cooking with automatic programmes and networking.

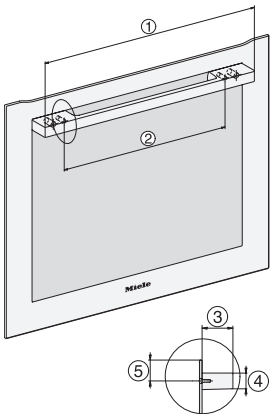



DG2740, DG7140, DGM7340, H2760B/BP, H7140BM, H7x64B/BP, H7x60B/BP installation drawings


1) 474 mm, 2) 360 mm, 3) 43 mm, 4) 22,5 mm, 5) 53.75 mm

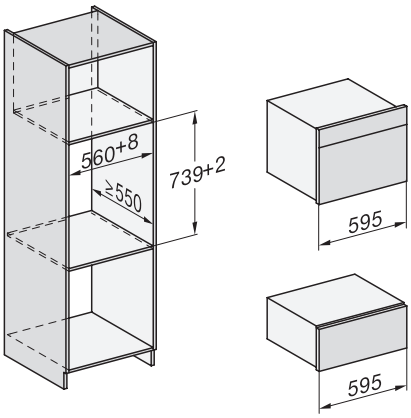



ESW7x20, DGC7x4xHCPro, DGC7x4xHCXPro installation drawings

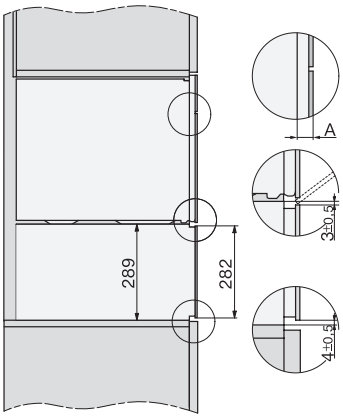


ESW7x20, DG7xxx, DGM7xxx installation drawings

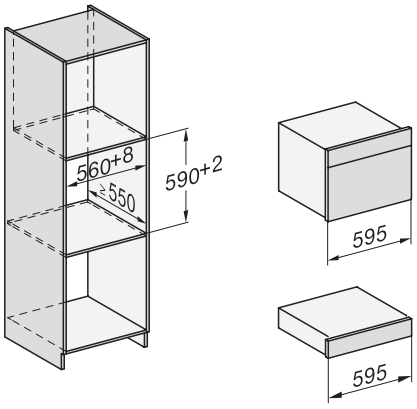



ESW7x10, DGC7x4xHCPro, DGC7x4xHCXPro, installation drawings

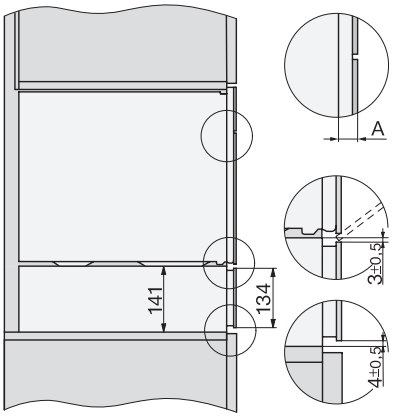



ESW7x10, EVS7010, DG7x4x, DGM7x4x installation drawings


A) 22 mm glass, 23,3 mm stainless steel

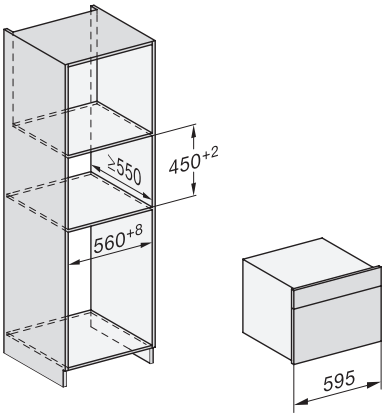



DG7xxx, DGM7xxx, installation drawings

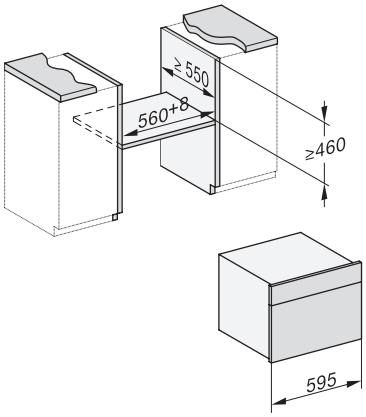


DG7x4x, DGM7x4x, DGC7x4x, DGC7x4xX, DGC7x4xHCPro, DGC7x4xHCXPro installation drawings

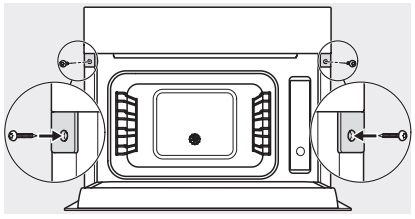

DG7xxx, DGM7xxx, installation drawings

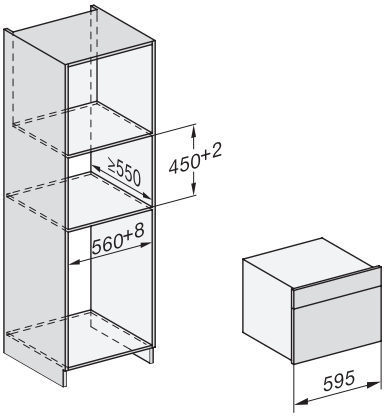



DG7x4x, DGM7x4x, installation drawings

DG 7140


Built-in steam oven

for healthy cooking with automatic programmes and networking.

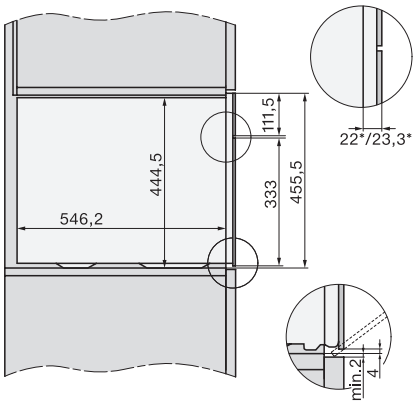



DG7x4x, DGM7x4x, DG7x4x-55, DGM7x4x-55, installation drawings

22 mm glass, 23,3 mm metal

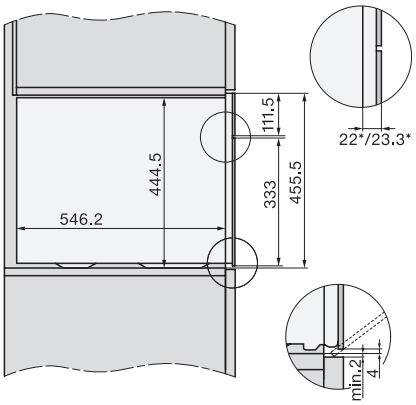


DG2x40, DG7x40, DGM7x4x – installation drawing – GB, AU

22 mm glass, 23,3 mm stainless steel

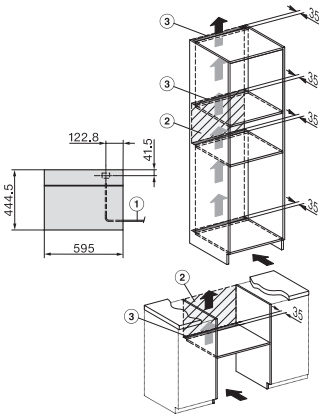


DG2740, DG2840, DG7140, DG7240, DG7440 - installation drawing – GB, AU

1) Mains connection cable, L=2000 mm, 2) No connection in this area, 3) Ventilation cutout min. 180 $cm^2$