


N 90, Built-in oven with steam function, 60 x 60 cm,
Stainless steel
B47FS34H0B



COOKING PASSION SINCE 1877



A+



Built-in oven with FullSteam and SLIDE&HIDE® - combining all heating types and steam cooking in a single oven with unrestricted access

- ✓ Slide&Hide® - unrestricted access in the oven interior and easy handling due to rotating handle
- ✓ Eco Clean with Base Clean - the duo that makes oven cleaning easier
- ✓ Shift Control - fast navigation through menus and simple operation with the TFT display.
- ✓ Home Connect – rediscover your kitchen with our connected home appliances, from wherever you are.
- ✓ Baking and Roasting Assistant with Automatic Programmes - the duo for optimal baking at your command

Features

Technical Data

Color / Material Front : Stainless steel
Construction type : Built-in
Door opening : Drop down
Min. required niche size for installation (HxWxD) : 585-595 x 560-568 x 550 mm
Dimensions : 595 x 596 x 548 mm
Dimensions of the packed product (HxWxD) : 660 x 660 x 690 mm
Control Panel Material : Glass
Door Material : Glass
Net weight : 42.3 kg
Length of electrical supply cord : 120.0 cm
EAN code : 4242004236047
Fuse protection : 16 A
Voltage : 220-240 V
Frequency : 50; 60 Hz
Plug type : no plug (electrical connection by electrician)
Number of cavities (2010/30/EC) : 1
Usable volume (of cavity) - NEW (2010/30/EC) : 71 l
Energy efficiency rating : A+
Energy consumption per cycle conventional (2010/30/EC) : 0.87 kWh/cycle
Energy consumption per cycle forced air convection (2010/30/EC) : 0.69 kWh/cycle
Energy efficiency index (2010/30/EC) : 81.2 %
Included accessories : 1 x grid, 1 x universal pan, 1 x steam container, punched, size S, 1 x steam container, punched, size XL, 1 x steam container, unpunched, size S

Optional accessories

Z11AB15A0 Baking tray, non-stick ceramic coated
Z11SZ00X0 SeamlessCombination mounting kit
Z11SZ80X0 SeamlessCombination 60 + 29cm
Z11SZ90X0 SeamlessCombination 60 + 45cm
Z12CB10A0 Baking tray, anthracite enamelled
Z12CM10A0 Moussaka pan, anthracite enamelled
Z13TC10X0 ComfortFlex Rail (1 level) f. steam



4 242004 236047

*N 90, Built-in oven with steam function, 60 x 60
cm, Stainless steel
B47FS34H0B*



COOKING PASSION SINCE 1877

Features

Design

- 4.1" TFT colour and graphics display with ShiftControl
- Cavity inner surface: enamel anthracite

Features

- HomeConnect ready on WLAN
- Control panel lock
Automatic safety switch off
Residual heat indicator
Start button
Door contact switch
- Temperature proposal
Actual temperature display
Heating up indicator
automatic programmes:
- Baking and roasting assistant, Automatic programmes
- LED light, On/off button
- Water tank empty indicator
- Electronic clock timer

Cleaning

- EcoClean Direct : ceiling, back panel, side liners
- EcoClean programme, Base Clean programme

Programmes/functions

- Additional heating methods with steam: Steaming, Reheat with steam, Dough proving, Defrost
- Additional functions:
De-scaling programme
Drying function
Automatic boiling point detection
- Number of automatic programmes: 30 PC
- Rapid heat
- Cooling fan

Accessories


- 1-level flexible telescopic rail, full extension, Stop function
- 1 x steam container, punched, size S, 1 x steam container, punched, size XL, 1 x steam container, unpunched, size S, 1 x grid, 1 x universal pan

Performance/technical information

- Energy efficiency rating (acc. EU Nr. 65/2014): A+
Energy consumption per cycle in conventional mode: 0.87 kWh
Energy consumption per cycle in fan-forced convection mode: 0.69 kWh
Number of cavities: Main cavity
Heat source: electrical
Cavity volume: 71 litre
- 1 l Water tank capacity
- Location of water tank: Outside cavity
- Total connected load electric: 3.45 KW
- Temperature range 40 °C - 250 °C
- 120 cm Cable length
- Nominal voltage: 220 - 240 V
- Appliance dimension (h x w x d): 595 mm x 596 mm x 548 mm
- Niche dimension (h x w x d): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- Please refer to the dimensions provided in the installation manual

N 90, Built-in oven with steam function, 60 x 60
cm, Stainless steel
B47FS34H0B

Dimensioned drawings

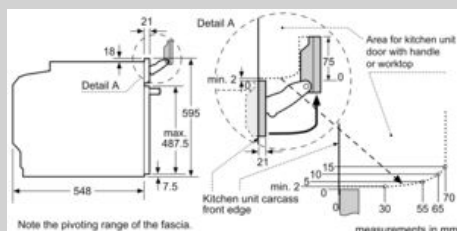

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm

