


iQ500, Gas hob, 75 cm, Stainless steel
EC7A5RB90

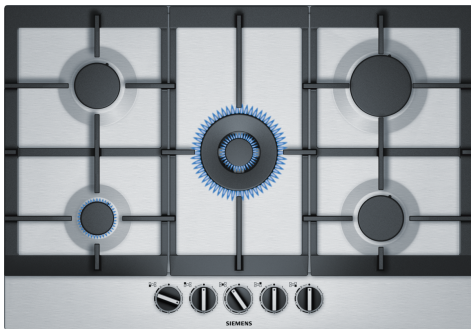

Optional accessories

| | |
|----------|-------------------|
| HZ211310 | Simmer cap |
| HZ233540 | Wok ring |
| HZ241110 | Small pot support |
| HZ298105 | Simmer plate |

The gas hob with stepFlame Technology for precise flame control in nine steps.

- ✓ stepFlame Technology – Precise flame control with nine different settings.
- ✓ Dual Wok Burner 5 kW – Go from simmer to stir-fry on one burner.
- ✓ High-quality materials and workmanship – continuous cast-iron pan supports.
- ✓ Biomethane ready – Power your gas hob with renewable biomethane gas.
- ✓ The extremely convenient sword knob makes it easy to control and monitor the power level selected.

Features

Technical Data

Product name/family: gas hob w integrated controls
 Design: Built-in
 Source of energy: Gas
 Number of cooking zones: 5
 Type of control setting devices:sword knobs
 Min. required niche size for installation (HxWxD):45 x 560-562 x 480-492 mm
 Width of the appliance: 750 mm
 Dimensions: 53 x 750 x 520 mm
 Dimensions of the packed product (HxWxD): ... 145 x 793 x 597 mm
 Weight: 15.0 kg
 Gross weight: 16.5 kg
 Residual heat indicator:without
 Location of control panel: Front
 Basic surface material:Stainless steel
 Color of surface: Stainless steel
 Length of electrical supply cord: 100.0 cm
 EAN code:4242003676134
 Gas connection rating: 12500 W
 Fuse protection:3 A
 Nominal power:220-240 V
 Frequency:50; 60 Hz



iQ500, Gas hob, 75 cm, Stainless steel EC7A5RB90

Features

Design

- Stainless steel surface
- Cast iron pan supports

Usage convenience

- Step Flame technology - 9 steps: precisely control and adjust the flame in nine defined levels.
- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

Burners and power

- 5 burner gas hob including:
- Including 1 dual control wok burner: use an extra wide power range, separately controlling two flame rings.
- Left front: Economy burner up to 1 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Center front: wok burner up to 5 KW (depending on gas type)
- Right rear: High-speed burner up to 3 KW (depending on gas type)
- Right front: Standard burner up to 1.75 KW (depending on gas type)

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 53 x 750 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm
- Power cord: 1 m
- Connected load: 12.5 KW

